


Hex Head Slotted Screws



Model SBTEPAM()-L

PA66 Polyamide 66 / Engineering Plastics

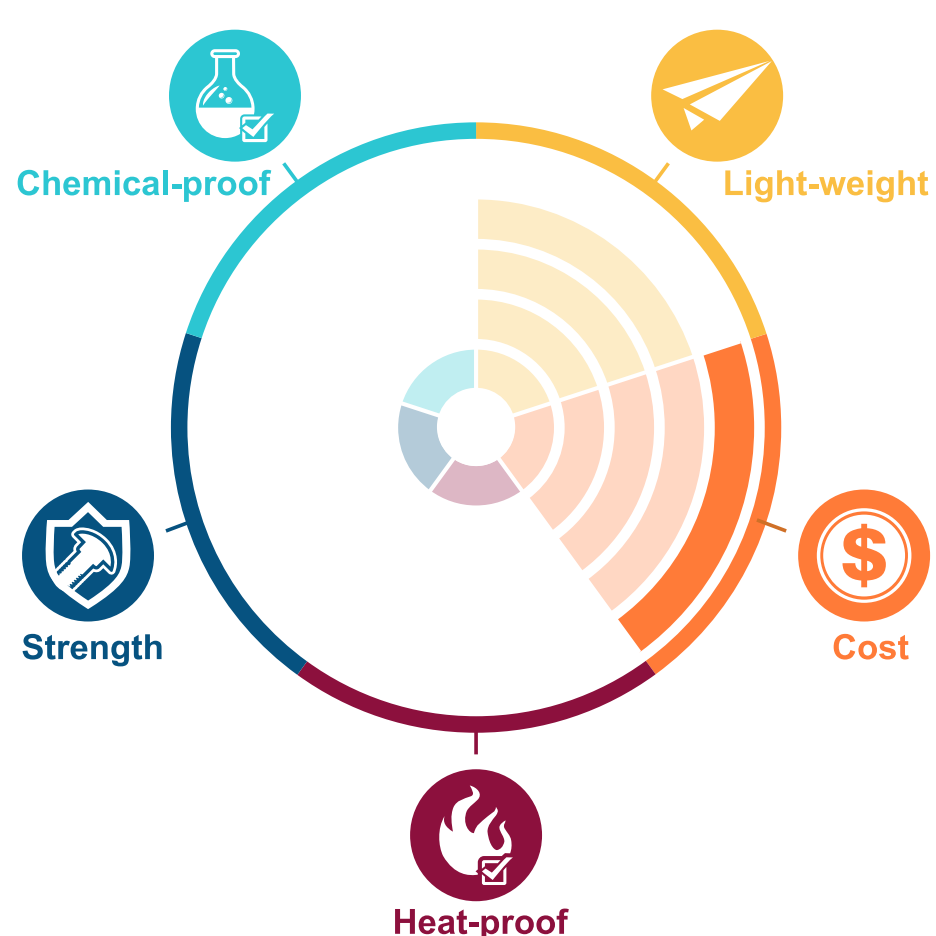


Nylon 66 should be used if a part is required to be exposed to higher temperatures. Additionally, its stiffness and good tensile and flexural modulus make it an ideal material for applications that need a long-term repeating working condition. Typical application parts include: friction bearings, radiator caps and tire ropes.


Product Properties (compared to PA6)

1. Slightly less moisture absorption ability.
2. Better wear resistance.
3. Better chemical resistance to acids.
4. Higher heat deflection temperature.

Applied industries

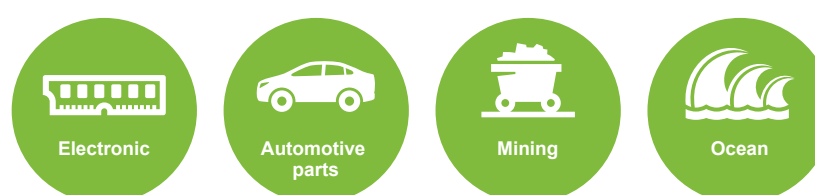

Specs

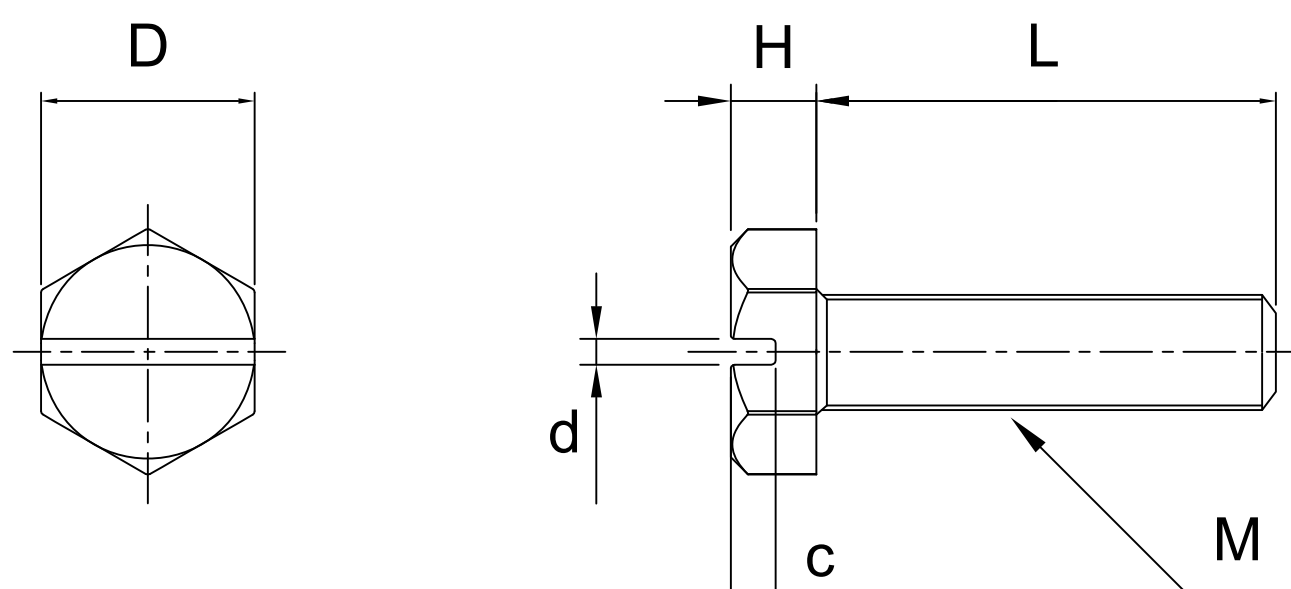

Model: SBTEPAM()-L

M	4	5	6	8	10	12
DxH	7x2.8	8x3.5	10x4	13x5.5	17x7	19x8
c	1.4	1.8	2.1	2.8	3.5	4
d	1	1.2	1.2	2.1	2.2	2.2
Pitch	0.7	0.8	1	1.25	1.5	1.75
L(mm)	4	-	-	-	-	-
	5	•	-	-	-	-
	6	•	•	-	-	-
	8	•	•	-	-	-
	10	•	•	•	•	-
	12	•	•	•	•	-
	15	•	•	•	•	•
	16	•	•	•	•	-
	20	•	•	•	•	•
	25	•	•	•	•	•
	30	•	•	•	•	•
	35	•	•	•	•	•
40	•	•	•	•	•	
45	-	-	•	•	•	
50	-	-	•	•	•	

Contact Information

No.60-3, Dongqi 7th Ln., Lukang Township, Changhua County 505008, Taiwan.
 TEL: +886-4-778-4688
 FAX: +886-4-778-4268
 E-mail: sales@plasautotw.com

