


Hex Socket Screws



Model SCBPVDM()-(L)

PVDF Fluorine Resin / Advanced Engineering Plastics

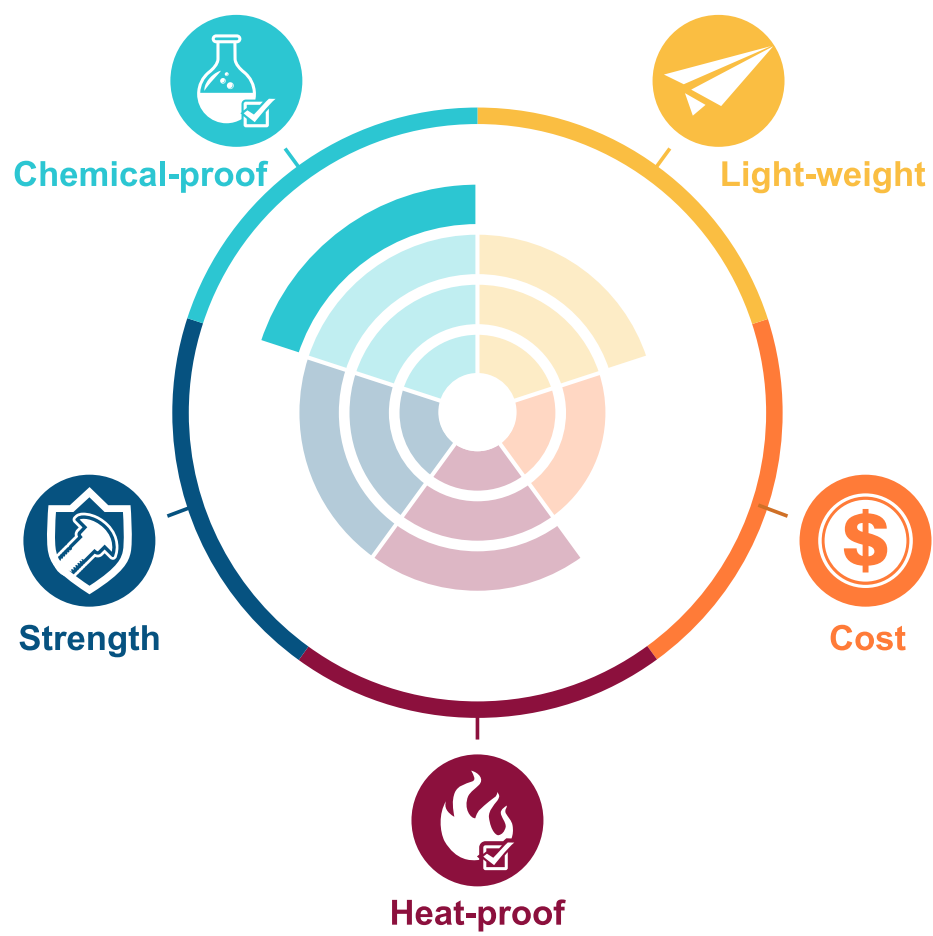


Among the group of Fluoropolymers, PVDF (Polyvinylidene Fluoride) has the premium properties as the best mechanical strength and toughness, low friction coefficient, strong corrosion resistance, anti-aging, weather resistance, anti-radiation, etc.


Product Properties

1. Excellent chemical resistance to most of aggressive solvents.
2. Excellent mechanical strength & high abrasion resistance.
3. Continuous use temperature up to 150°C.
4. Excellent ageing resistance.
5. Resistance to UV and nuclear radiations.
6. Excellent intrinsic fire resistance.

Applied industries

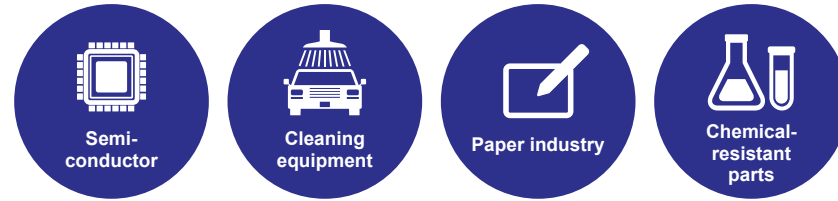

Specs

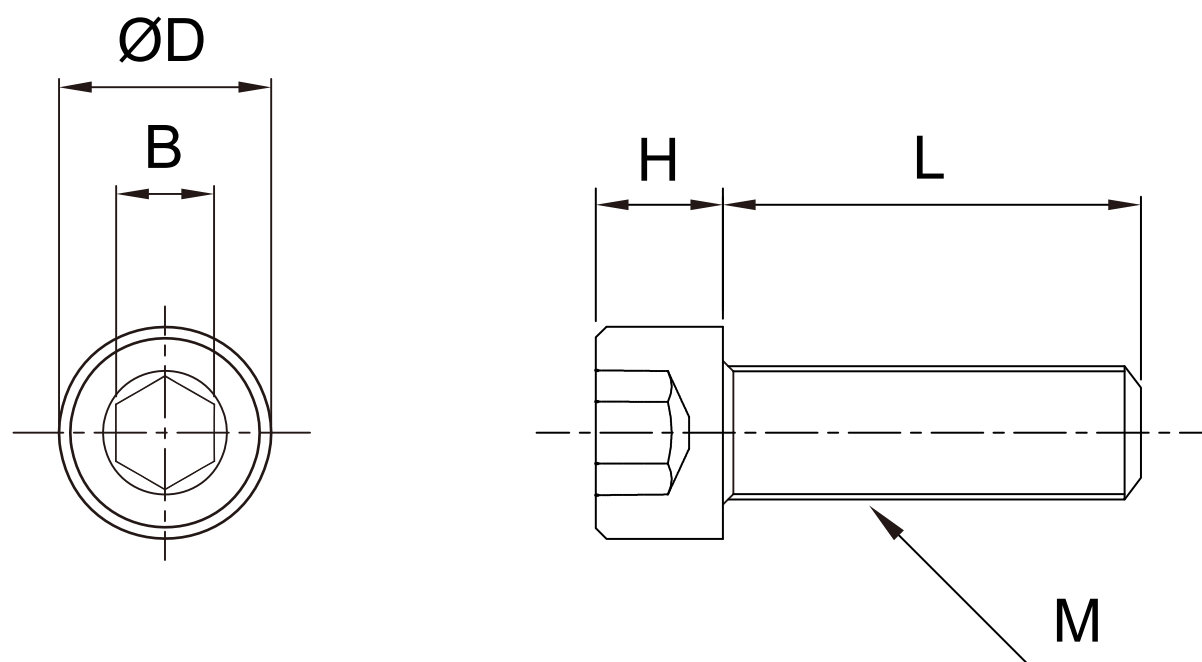

Model: SCBPVDM()-(L)

M	3	4	5	6	8
DxH	5.5x3	7x4	8.5x5	10x6	13x8
B	2.5	3	4	5	6
Pitch	0.5	0.7	0.8	1	1.25
L(mm)	4	•	-	-	-
	5	•	•	-	-
	6	•	•	•	-
	8	•	•	•	-
	10	•	•	•	•
	12	•	•	•	•
	15	•	•	•	•
	16	•	•	•	•
	20	•	•	•	•
	25	•	•	•	•
	30	-	•	•	•
	35	-	•	•	•
	40	-	•	•	•
45	-	-	-	•	
50	-	-	-	•	

Contact Information

No.60-3, Dongqi 7th Ln., Lukang Township, Changhua County 505008, Taiwan.
 TEL: +886-4-778-4688
 FAX: +886-4-778-4268
 E-mail: sales@plasautotw.com

