


Hex Head Slotted Screws



Model SBTEPVDM()-(L)

PVDF Fluorine Resin / Advanced Engineering Plastics

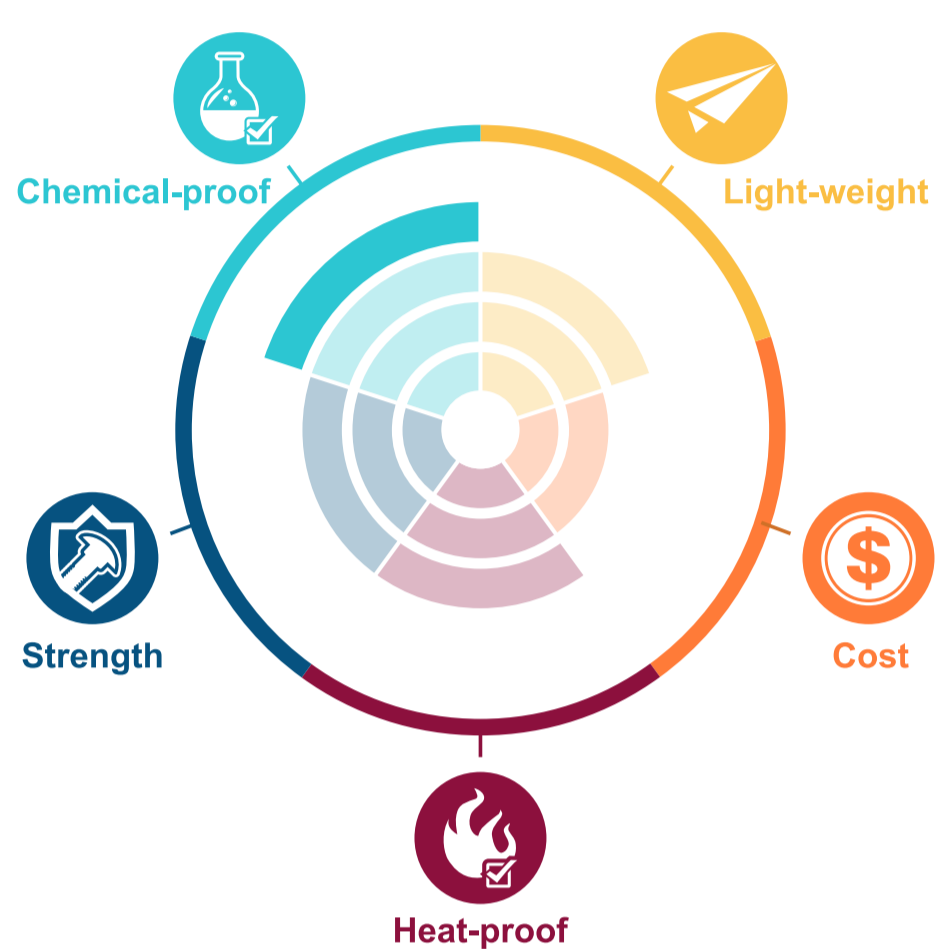

Among the group of Fluoropolymers, PVDF (Polyvinylidene Fluoride) has the premium properties as the best mechanical strength and toughness, low friction coefficient, strong corrosion resistance, anti-aging, weather resistance, anti-radiation, etc.


Product Properties

1. Excellent chemical resistance to most of aggressive solvents.
2. Excellent mechanical strength & high abrasion resistance.
3. Continuous use temperature up to 150°C.
4. Excellent ageing resistance.
5. Resistance to UV and nuclear radiations.
6. Excellent intrinsic fire resistance.

Applied industries



Specs

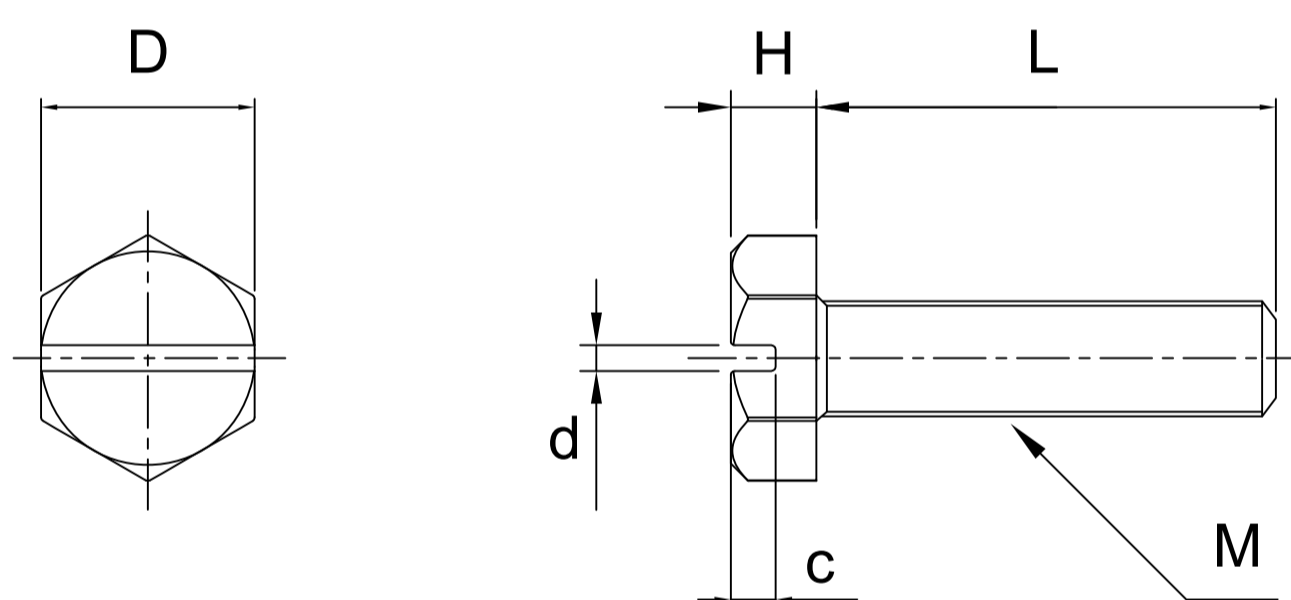

Model: SBTEPVDM()-(L)

M	4	5	6	8	10	12
DxH	7x2.8	8x3.5	10x4	13x5.5	17x7	19x8
c	1.4	1.8	2.1	2.8	3.5	4
d	1	1.2	1.2	2.1	2.2	2.2
Pitch	0.7	0.8	1	1.25	1.5	1.75
L(mm)	4	-	-	-	-	-
	5	•	-	-	-	-
	6	•	•	-	-	-
	8	•	•	-	-	-
	10	•	•	•	-	-
	12	•	•	•	•	-
	15	•	•	•	•	•
	16	•	•	•	•	-
	20	•	•	•	•	•
	25	•	•	•	•	•
	30	•	•	•	•	•
	35	•	•	•	•	•
40	•	•	•	•	•	
45	-	-	•	•	•	
50	-	-	•	•	•	

Contact Information

No.60-3, Dongqi 7th Ln., Lukang Township, Changhua County 505008, Taiwan.
 TEL: +886-4-778-4688
 FAX: +886-4-778-4268
 E-mail: sales@plasautotw.com

