



Countersunk Phillips Screws

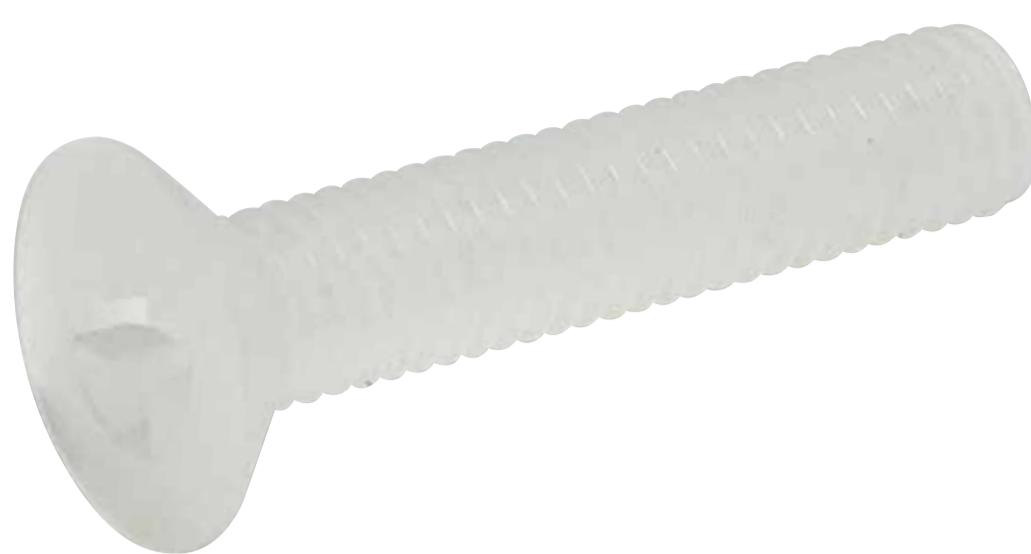

Model SFHPVDM()-(L)

PVDF Fluorine Resin / Advanced Engineering Plastics

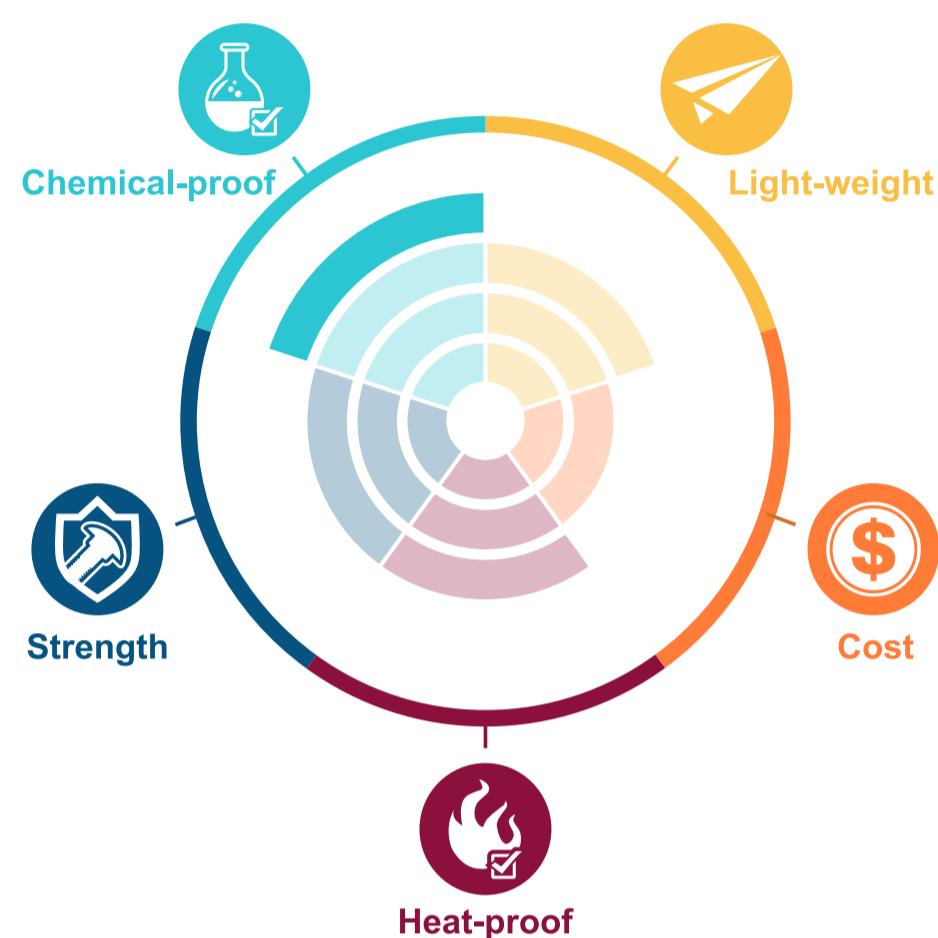


Among the group of Fluoropolymers, PVDF (Polyvinylidene Fluoride) has the premium properties as the best mechanical strength and toughness, low friction coefficient, strong corrosion resistance, anti-aging, weather resistance, anti-radiation, etc.


Product Properties

1. Excellent chemical resistance to most of aggressive solvents.
2. Excellent mechanical strength & high abrasion resistance.
3. Continuous use temperature up to 150°C.
4. Excellent ageing resistance.
5. Resistance to UV and nuclear radiations.
6. Excellent intrinsic fire resistance.

Applied industries

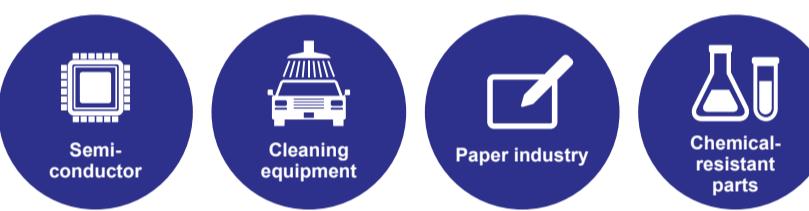

Specs

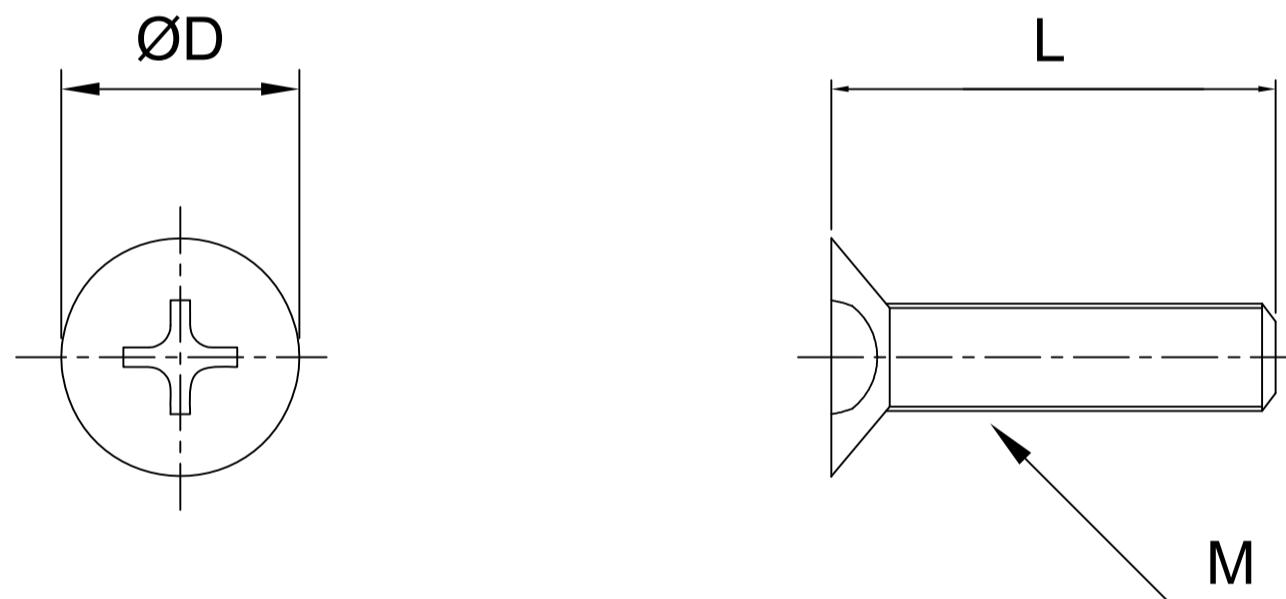

Model: SFHPVDM()-(L)

M	2	3	4	5	6	8
D	4	6	8	10	12	16
Pitch	0.4	0.5	0.7	0.8	1	1.25
4	•	•	-	-	-	-
5	•	•	•	-	-	-
6	•	•	•	-	-	-
8	•	•	•	•	-	-
10	•	•	•	•	•	•
12	-	•	•	•	•	•
15	-	•	•	•	•	•
16	-	•	•	•	•	•
20	-	•	•	•	•	•
25	-	•	•	•	•	•
30	-	-	•	•	•	•
35	-	-	•	•	•	•
40	-	-	•	•	•	•
45	-	-	-	-	•	•

Contact Information

No.60-3, Dongqi 7th Ln., Lukang Township, Changhua County 505008, Taiwan.

TEL: +886-4-778-4688

FAX: +886-4-778-4268

E-mail: sales@plasautotw.com

www.plasautotw.com

