


Set Screws



Model HSPVDM()-(L)

PVDF Fluorine Resin / Advanced Engineering Plastics

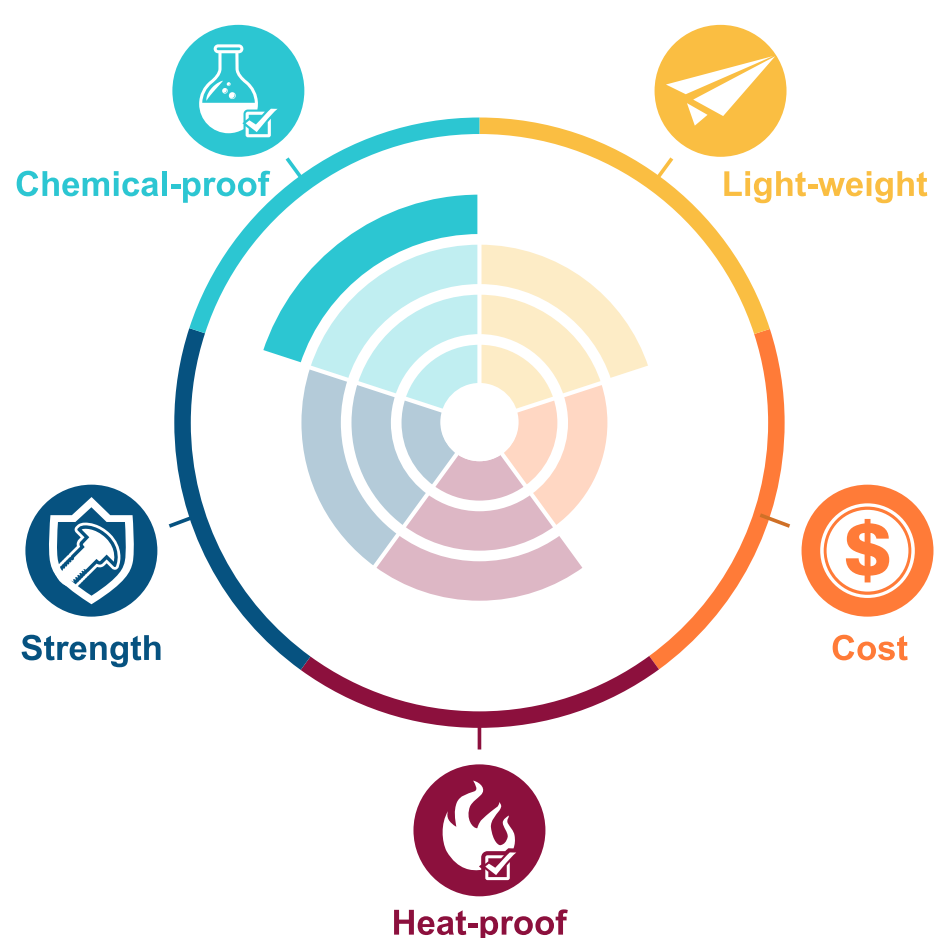

Among the group of Fluoropolymers, PVDF (Polyvinylidene Fluoride) has the premium properties as the best mechanical strength and toughness, low friction coefficient, strong corrosion resistance, anti-aging, weather resistance, anti-radiation, etc.


Product Properties

1. Excellent chemical resistance to most of aggressive solvents.
2. Excellent mechanical strength & high abrasion resistance.
3. Continuous use temperature up to 150°C.
4. Excellent ageing resistance.
5. Resistance to UV and nuclear radiations.
6. Excellent intrinsic fire resistance.

Applied industries



Specs

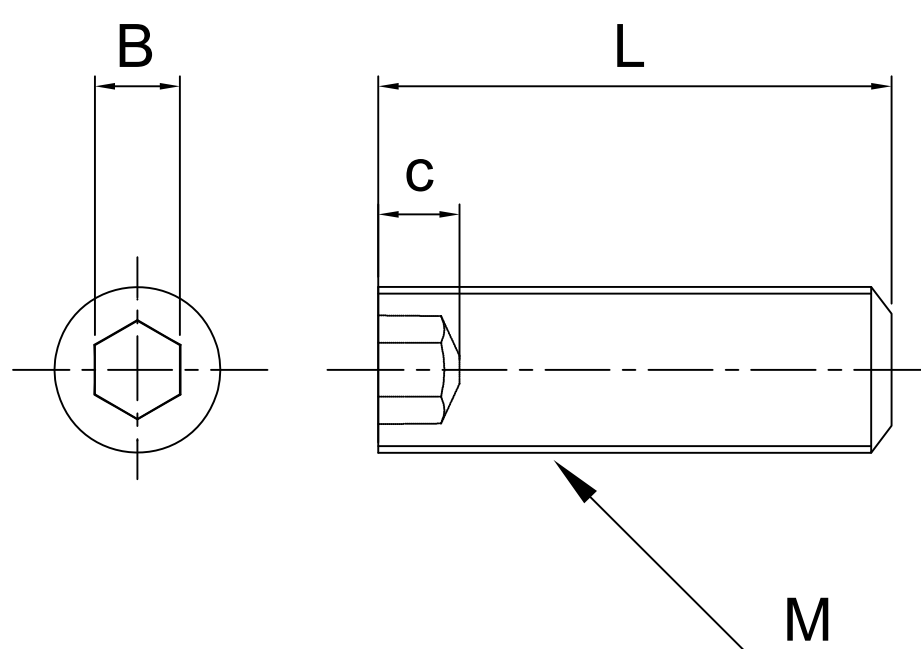

Model: HSPVDM()-(L)

M	3	4	5	6	8
BxC	1.5x2	2x2.5	2.5x3	3x3.5	4x5
Pitch	0.5	0.7	0.8	1	1.25
L(mm)	4	●	-	-	-
	5	●	●	●	-
	6	●	●	●	●
	8	●	●	●	●
	10	●	●	●	●
	12	●	●	●	●
	15	●	●	●	●
	20	-	●	●	●
	25	-	-	-	●
30	-	-	-	-	●

Contact Information

No.60-3, Dongqi 7th Ln., Lukang Township, Changhua County 505008, Taiwan.
 TEL: +886-4-778-4688
 FAX: +886-4-778-4268
 E-mail: sales@plasautotw.com

