


# Bushing



Model BUPA-(Inner diameter)

## PA66Nylon Polyamide 66 / General Plastics

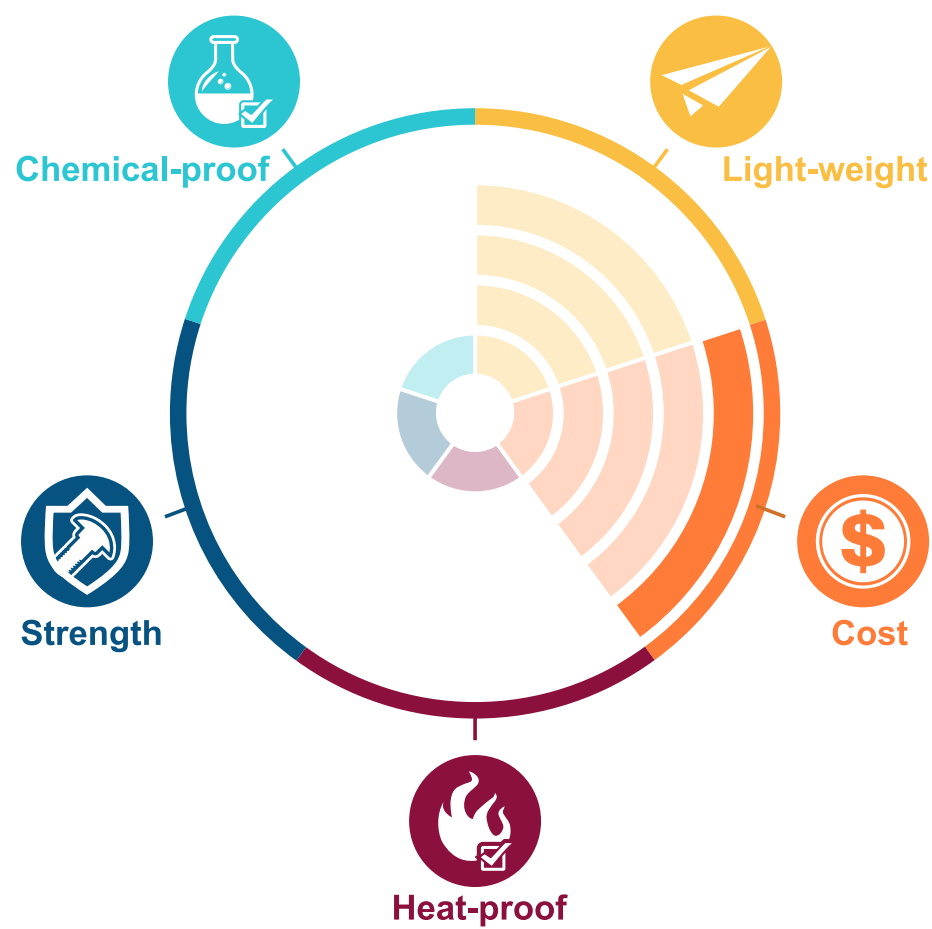

PA66 is a polyamide material with higher melting point. It is a semicrystalline-crystalline material, which still retains higher strengths and rigidity at higher temperatures. After molding, PA66 still absorbs moisture at a level depending on the composition of the material, wall thickness and environmental conditions. It is widely applied in automotive industry, equipment housing, and other products that need to withstand impact and have high strength.


### Characteristics

1. Good impact resistance and low-temperature property (as low as -40°C).
2. Good mechanical strength.
3. Good chemical resistance.
4. Low friction coefficient and good electric property.
5. Halogen-free and eco-friendly.

### Applied industries



## Specs

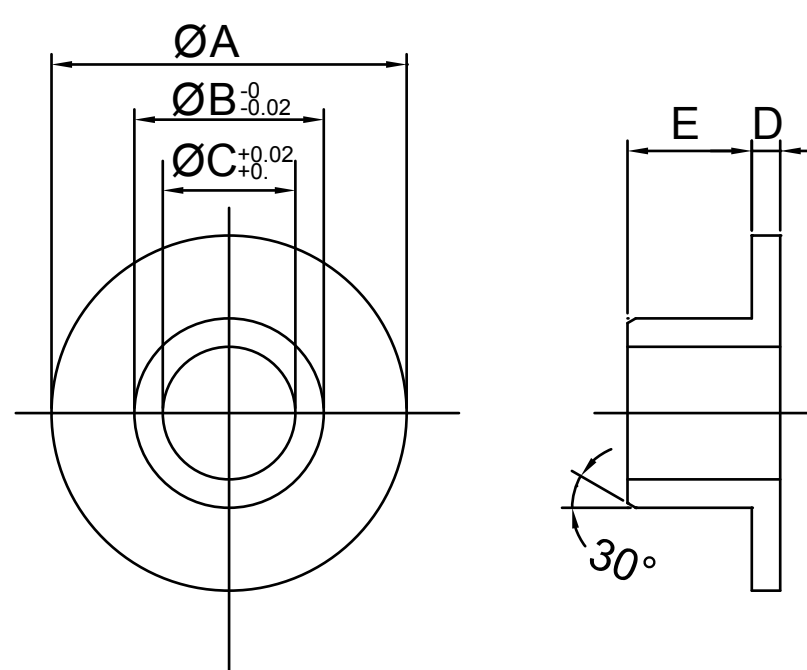

Model: BUPA-(Inner diameter)

Specs	2.6	3	4	5	6	8	10	12	15	16
Dimensions										
A	6.0	7.0	9.0	12.0	12.0	15.0	18.0	20.0	23.0	24.0
B	3.6	4.0	5.0	6.0	8.0	10.0	12.0	14.0	17.0	18.0
C	2.6	3	4	5	6	8	10	12	15	16
D	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
E	1.1	2.3	3.0	5.0	6.0	7.5	9.0	12.0	12.0	17.0

### Contact Information

No.60-3, Dongqi 7th Ln., Lukang Township, Changhua County 505008, Taiwan.  
 TEL: +886-4-778-4688  
 FAX: +886-4-778-4268  
 E-mail: sales@plasautotw.com

